ISONIC WAVE TSE

The Ultrasonic Sealing System for Tubes






Infos oplino

ISONIC WAVE TSE

Ultrasonic Tube Sealing Unit TSE

Compact module for integration into filling lines

Tubes and complex laminate structures can be tightly welded or sealed with the individually adapted tool contours of the tube sealing unit. The highly compact, slim unit can easily be aligned with a module package for multi-web presslines.

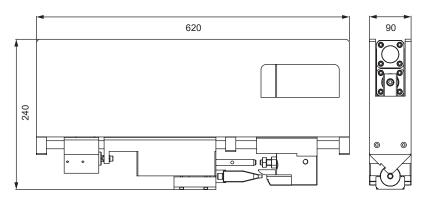

Technical data	
Max. sealing width [mm]	90
Max. stroke [mm]	2 x 30
Max. closing force [N]	430
Number of cycles [cycles/min] at max. stroke	12
Max. air pressure [bar]	6
Reach on anvil side [mm]	164
Reach on sonotrode side [mm] at 35 kHz	456
Dimensions of sealing tongs WxHxD [mm]	90 x 240 x 620



Advantages

- 35 kHz ultrasonic technology
- Ultrasonic tools and sealers in one unit
- Complete system for integration in bottler lines
- Continuous guide system for vibrator structure and anvil
- Plane-parallel system of sonotrode and anvil
- Sealing strength adjustable between 50 – 430 N
- Interfering contours above tool level (not in the seal area)
- Optional fixed stop



SONOTRONIC GmbH

Headquarters Becker-Goering-Str. 17-25 76307 Karlsbad Germany

Phone: +49 7248 9166-0 Fax: +49 7248 9166-144 info@sonotronic.de www.sonotronic.de

SONOTRONIC, Inc.

Branch USA 31132 Century Drive Wixom, MI 48393, USA Phone: +1 248 987 5970 Fax: +1 248 987 5964 info@sonotronic.com www.sonotronic.com

Linked with success.

Industry solutions

- Automotive
- Plastics
- Packaging & Food
- Technical Textiles
- Environmental

Products

- Special machines
- Standard machines
- Ultrasonic systems
- Ultrasonic components

Technologies

- Ultrasonic
- Infrared
- Hot plateHot air

